

Style 16-9


# ProxCard® Plus

## Proximity/Wiegand Combination Card

The ProxCard Plus combination card offers proximity and Wiegand technologies with optional photo ID capability on a single access control card.

### Benefits

- Offers a one-card solution for companies desiring to incorporate a combination of proximity, Wiegand, bar code, magnetic stripe and photo ID technologies for multiple facilities.
- Ideal for companies transitioning from a Wiegand technology system to an HID proximity-based system.
- Card thickness is suitable for use with all Wiegand readers and most direct image printers and magnetic stripe readers.

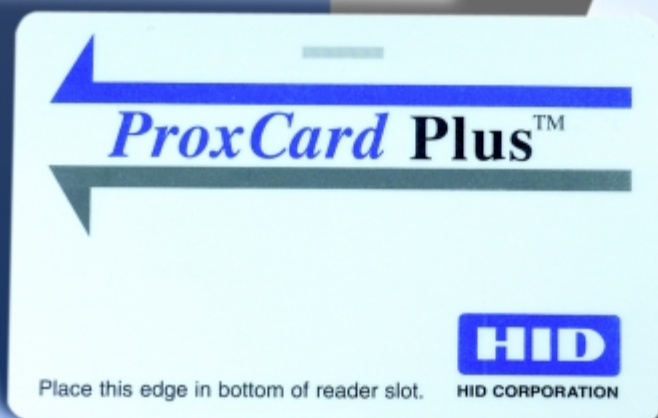

# ProxCard® Plus

## Features

### Proven, reliable technology

The read range is extremely consistent and is unaffected by body shielding or variable environmental conditions, even when close to keys and coins.

### Thin

Can be carried with credit cards in a wallet or purse.

### Photo compatible

Can be directly printed with video image printers and horizontally slot punched for easy use.

### Cross-reference

A cross-reference list correlating the external card number and the programmed ID number is provided for easy system administration. External numbering matching the encoded numbers is available.

### Security

The Wiegand code strip offers over one trillion unique codes. The proximity transponder is programmed to match the Wiegand strip.

### Long life

Passive, no-battery design allows for an infinite number of reads.

### Durability

Strong, flexible and resistant to cracking and breaking.

### Custom graphics


Custom multicolor graphics are available.

### Warranty

Provided with a 15-month warranty against defects in materials and workmanship (see complete warranty policy for details).

LIT1376DS 5/00, supersedes 12/97

\*Depending on local installation conditions.

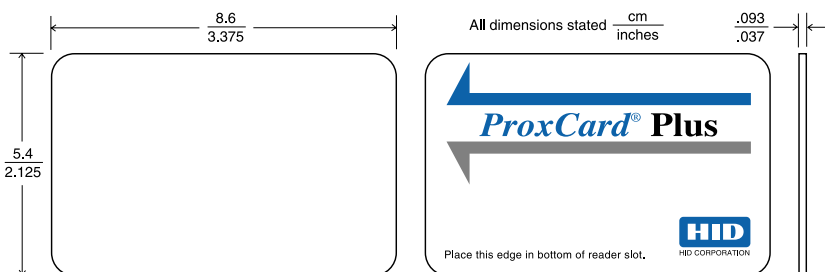

[www.HIDCorp.com](http://www.HIDCorp.com)

## Specifications

### Typical maximum\* read range

MiniProx™ reader-up to 2" (5 cm)

ThinLine II® reader-up to 1.5" (3.7 cm)

ProxPro® reader-up to 3" (7.5 cm)

MaxiProx® reader-up to 10" (25 cm)

### Code strip layout options

A long edge / right side

A1 long edge / left side

### Dimensions

2.125" x 3.375" x 0.037" max.

(5.40 x 8.57 x 0.094 cm)

### Card construction

Thin, vinyl laminate with an internal Wiegand code strip and proximity circuit. An external ABA standard, high coercivity magnetic stripe is optional.

### Operating temperature

-50° to 158° F (-45° to 70° C)

### Weight

0.17 oz. (4.8 gm)

### Part number

Style No.: 16-9

Description: 125 kHz, plain white finish (front), HID artwork (back), customer-specified ID numbers, location marked for slot punch. (Please see "How to Order" guide for a description of the options and associated part numbers).

### Options

- Card finish for direct printing (glossy or satin)
- Magnetic stripe
- External card numbering
- Slot punch (horizontal or vertical)
- Custom graphics



**HID CORPORATION**

9292 Jeronimo Road  
Irvine, CA 92618-1905 U.S.A.  
(949) 598-1600 (800) 237-7769  
FAX (949) 598-1690